



**Item #  
1500T-ADV**

# 1500 Gallon Top Seam AdvanTex™ Tank

**Top  
View**

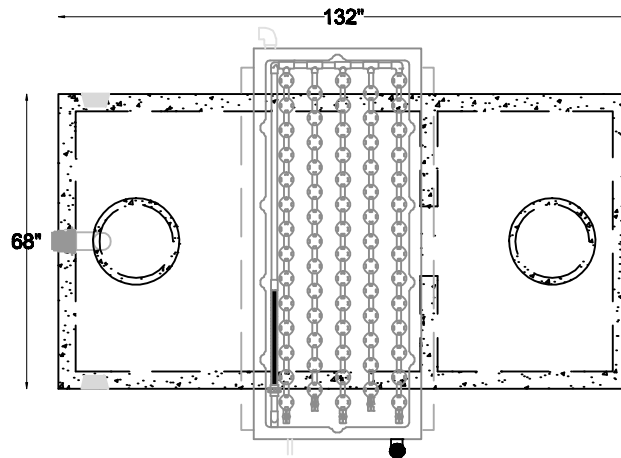

**Section  
View**

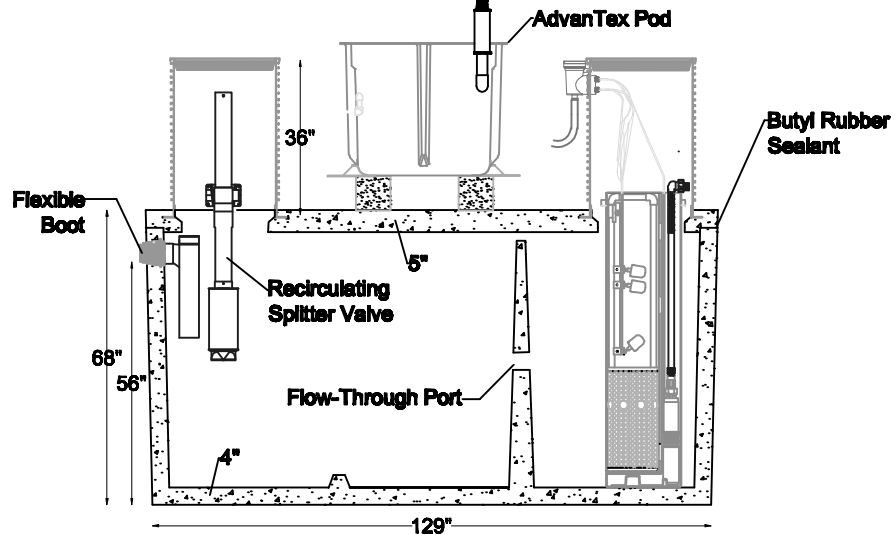

**Tank:**

**\*Meets ASTM C-1227 spec including the C-1644-06 for resilient connectors**

- 4000 psi concrete
- PVC riser included with system
- Minimum of 3 feet cover on tank to allow for AdvanTex™ system

**System:**

- 'B' Systems have an additional basin or 500 gallon tank for discharge pump
- 'A' Systems may have an additional 500 gallon tank with dosing siphon
- Complete system installation available in some areas

Digging Specs	Invert		Dimensions			Net Capacity			Net Weight		
	Inlet	Outlet	Length	Width	Height	Inlet Side	Outlet Side	Total	Lid	Tank	Total
13' Long x 8' Wide 3' Cover Optimal	56"	73"	132"	68"	104"	1,002 gallons	503 gallons	1,505 gallons	3,600 lbs	11,180 lbs	14,780 lbs



**Water &  
Wastewater**

- Systems
- Products
- Service

**(719) 395-6764**

**Fax: (719) 395-3727**

**Website: [www.valleyprecast.com](http://www.valleyprecast.com)**

**Email: [frontdesk@valleyprecast.com](mailto:frontdesk@valleyprecast.com)**

**28005 Co. Rd. 317  
P.O. Box 925  
Buena Vista, CO 81211**